

# RANKIN

## 3 IN 1 SOIL CONDITIONERS




**3 IN 1 SOIL CONDITIONERS** are ideal for nurseries, berry growers, orchards, vineyards & general cultivation work. This unique tool combines heavy-duty high clearance S-Tines to break the soil. A spring-loaded spike tooth bar follows the S-tines to level and breakup clods. The aggressive spring loaded rolling crumbler completes the work by mulching and leveling the soil. The cultivator main frame and the rolling crumbler support frame are both tapered to permit traveling through vegetation without damage.



***Innovative, Rugged & Labor Saving Attachments***

[www.rankinequipment.com](http://www.rankinequipment.com)

# 3 IN 1 SOIL CONDITIONERS

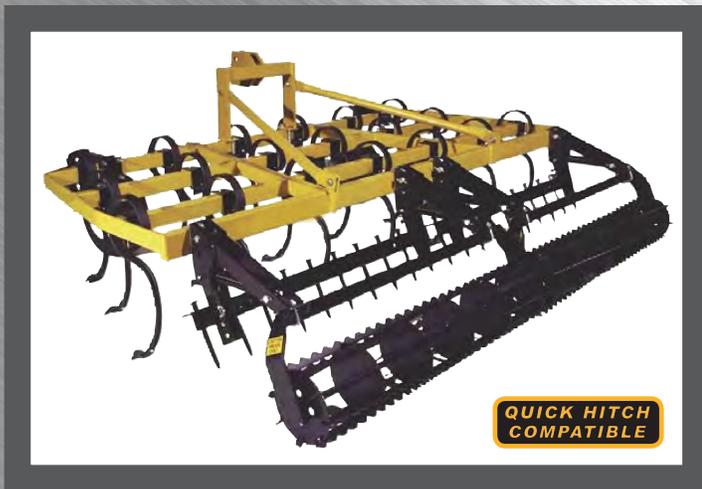

## SC SERIES

### FEATURES:

- 3 soil conditioning tools in 1 machine
- Heavy-duty 20" high clearance S-tines to penetrate and till up to 7" deep
- 7" sweeps standard - optional 1-3/8" reversible points - specify when ordering
- Spring loaded, 12" diameter rolling crumblers w/ serrated bars angled to finish mulching the soil
- Tapered frame & crumbler permits traveling through vegetation without damage

10' to 15' Models are equipped with Gauge Wheels

Models	Working Width	No. of Shanks	Shank Size	Shank Clearance	Hitch	HP Required	Weight
SC4	4'	7	1/2" x 1-3/4"	20"	Cat. 1	14 to 25	475 lbs.
SC5	5'	9	1/2" x 1-3/4"	20"	Cat. 1	18 to 32	620 lbs.
SC55	5-1/2'	10	1/2" x 1-3/4"	20"	Cat. 1	20 to 35	700 lbs.
SC6	6'	11	1/2" x 1-3/4"	20"	Cat. 1	22 to 39	800 lbs.
SC7	7'	13	1/2" x 1-3/4"	20"	Cat. 1	26 to 46	900 lbs.
SC8	8'	15	1/2" x 1-3/4"	20"	Cat. 2	30 to 53	1000 lbs.
SC10	10'	19	1/2" x 1-3/4"	20"	Cat. 2	38 to 67	1300 lbs.
SC12	12'	23	1/2" x 1-3/4"	20"	Cat. 2	46 to 81	1620 lbs.
SC13	13'	25	1/2" x 1-3/4"	20"	Cat. 2	52 to 92	1700 lbs.
SC14	14'	27	1/2" x 1-3/4"	20"	Cat. 2	56 to 98	1840 lbs.
SC15	15'	29	1/2" x 1-3/4"	20"	Cat. 2	58 to 102	1900 lbs.



Phone: (800) 426-2009 • (509) 453-8271 • Fax: (509) 457-2456

[www.rankinequipment.com](http://www.rankinequipment.com)